

# SUBMITTAL SHEET

## SCH 40 22½° ELBOW



|                       |  |
|-----------------------|--|
| JOB NAME              |  |
| JOB LOCATION          |  |
| ENGINEER              |  |
| CONTRACTOR            |  |
| TAG                   |  |
| PO NUMBER             |  |
| REPRESENTATIVE        |  |
| WHOLESALE DISTRIBUTOR |  |

*When installation of greens, traps, pools or other obstacles requires piping to follow contours, and the PVC pipe is too stiff for the bends, then use this injection molded 22½° Elbow. Although this elbow has been pressure rated to 315 psi, it has been tested to over 750 psi. These tests were conducted according to ASTM F1970 Standards. The slight bend of the 22½° Elbow makes this type of installation easy and trouble-free.*

### SPECIFICATIONS:

Maximum Working Pressure: 250/200\* psi @ 73 deg F (\*see Notes)

ASTM D1784 - Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly Vinyl Chloride (CPVC) Compounds

LISTINGS – NSF/ANSI Standard 61, Annex G: Drinking Water System Components Weighted average lead content of less than or equal to 0.25% and is in compliance with California’s Health & Safety Code Section 116875 (commonly known as AB1953) NSF/ANSI Standard 14: Plastics Piping system components and Related Materials. Includes ANSI Standard 61, Annex G.

### MATERIALS:

PVC Type 1 Cell Classification 12454-B

### HOW TO ORDER:


| PART #   | SIZE (in) | Ctn Qty |
|----------|-----------|---------|
| 465-015  | 1½        | 20      |
| 465-020  | 2         | 10      |
| 465-025  | 2½        | 10      |
| 465-030  | 3         | 5       |
| 465-040  | 4         | 4       |
| 465-060  | 6         | 3       |
| 465-100* | 10        | 1       |
| 465-120* | 12        | 1       |

### NOTES:

1½" - 4" - 250 p.s.i. working pressure

6" - 200 p.s.i. working pressure does not comply with ASTM D2466

\*FABRICATED FROM PIPE

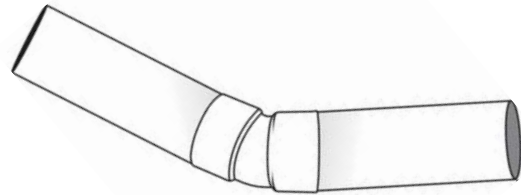

### WARRANTY:

Five Year Limited Performance Warranty

LASCO Fittings, Inc. products are warranted to be free from manufacturing defects in materials and workmanship. They are warranted against rot, rust, and electrolytic corrosion for a period of five years from date of installation. If LASCO products prove defective due to manufacturing defects in material or workmanship during that period, the manufacturer will provide new replacement units of the same type and size. No remedy will be granted under this warranty if LASCO products are not used strictly in accordance with LASCO’s directions with respect to use and storage or if the products have been modified in any way.

DO NOT USE LASCO FITTINGS FOR COMPRESSED AIR OR GASES.

DO NOT TEST PVC PIPING SYSTEMS WITH COMPRESSED AIR OR GASES.

DO NOT USE FITTINGS WITH LIQUIDS NOT RECOMMENDED BY LASCO.

MODIFICATIONS OF FITTINGS VOIDS THE WARRANTY.

414 Morgan Street • Brownsville, TN 38012  
(731) 772-3180 | [www.lascofittings.com](http://www.lascofittings.com)