

SUBMITTAL SHEET

ULTRAFIX COMPACT REPAIR COUPLING



Slip x Spigot

JOB NAME	
JOB LOCATION	
ENGINEER	
CONTRACTOR	
TAG	
PO NUMBER	
REPRESENTATIVE	
WHOLESALE DISTRIBUTOR	

- Compact Design for tight places
- Dual EPDM O-RINGS
- Seals throughout pistons full travel
- Can be used as Repair Coupling or an Expansion Joint
- NSF Certified
- Working Pressure: 1/2" - 2 1/2" - 235 psi @ 73°F • 3" - 6" - 150 psi @ 73°F

SPECIFICATIONS:

Maximum Working Pressure: 1/2" - 2 1/2" - 235 psi @ 73°F
3" - 6" - 150 psi @ 73°F

ASTM D1784 - Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly Vinyl Chloride (CPVC) Compounds


LISTINGS - NSF/ANSI Standard 61, Annex G: Drinking Water System Components Weighted average lead content of less than or equal to 0.25% and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953) NSF/ANSI Standard 14: Plastics Piping system components and Related Materials. Includes ANSI Standard 61, Annex G.

MATERIALS:

PVC Type 1 Cell Classification 12454-B

HOW TO ORDER:

PART #	SIZE (in)	Ctn Qty
CUF-005	1/2	36
CUF-007	3/4	24
CUF-010	1	18
CUF-012	1 1/4	12
CUF-015	1 1/2	12
CUF-020	2	8
CUF-025	2 1/2	4
CUF-030	3	3
CUF-040	4	2
CUF-060	6	1

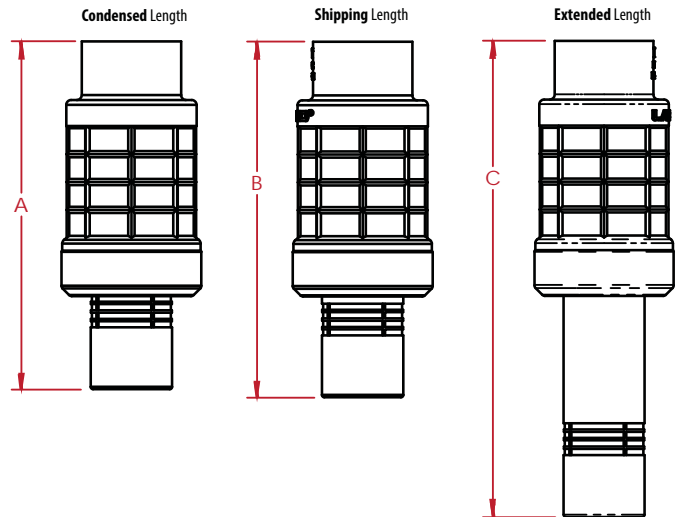

Size (inch)	Condensed Length (A)	Shipping Length (B)	Extended Length (C)
1/2	4.92	5.04	6.87
3/4	5.38	5.51	7.64
1	5.62	5.75	7.69
1 1/4	6.58	6.83	9.08
1 1/2	6.73	6.98	9.52
2	8.30	8.55	12.03
2 1/2	12.75	N/A	17.00
3	13.50	N/A	18.00
4	15.00	N/A	19.75
6	18.50	N/A	26.25