


ISOZone™ Series

Isolation Valve Connectors

- 2" ACME thread and o-ring seal design eliminates the need of Teflon tape or sealing paste.
- Designed for ease of installation.
- Rated at 315 psi.
- The FACME x FACME 90° elbows and MACME adapter allows rotation to accomplish perpendicular placement of lateral isolation valves.
- Allows maintenance personnel a quick and trouble-free method of replacing worn and corroded valves.

- Four products offered:

- 2" FACME x FACME 90° Elbow
- 2" FACME x Socket 90° Elbow
- 2" Socket x Socket x FACME Tee
- 2" MACME Adapter

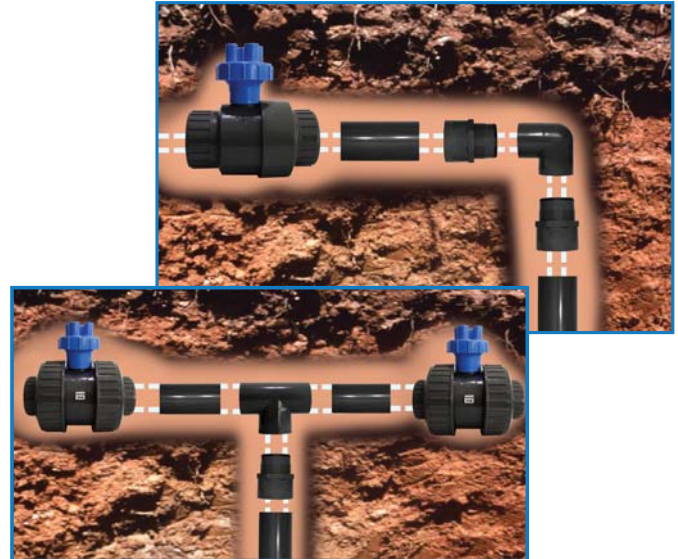

Part No	Description	Size	Ctn Qty
302-020	Tee (Socket x Socket x FACME)	2"	10
307-020	90° Elbow (Socket x FACME)	2"	10
308-020	90° Elbow (FACME x FACME)	2"	10
336-020	Adapter (MACME)	2"	10



(Socket x Socket x Female ACME)



(Socket x Female ACME)



Female ACME x Female ACME



Male ACME

STANDARDS AND SPECIFICATIONS - Compression Fittings

MATERIAL – Compression Fittings are PP-B.
LISTINGS – NSF - 61 (National Sanitation Foundation) for potable water services.

Contact Us:

414 Morgan Street • Brownsville, TN 38012 • (731) 772-3180 • (800) 776-2756 • Fax: (731) 772-0835

visit our website: www.lascofittings.com